



Drive Tire

# ZETUM TIRE

## ZDR02

Block type pattern to ensure traction

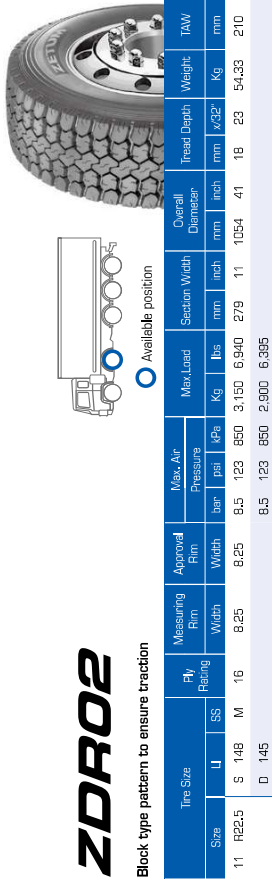



 Available position

Tire Size	Ply Rating	Measuring Rim Width	Approval Rim Width	Max. Air Pressure		Max. Load	Section Width	Overall Diameter	Tread Depth	Weight	TAW					
				bar	psi							mm	inch	mm	x/32"	Kg
11 R22.5	S 148 M 16	8.25	8.25	8.5	123	850	3,150	6,940	279	11	1054	41	18	23	54.33	210
D 145				8.5	123	850	2,900	6,385								

## ZDR03

Deep tread depth to enhance cost per mile capability

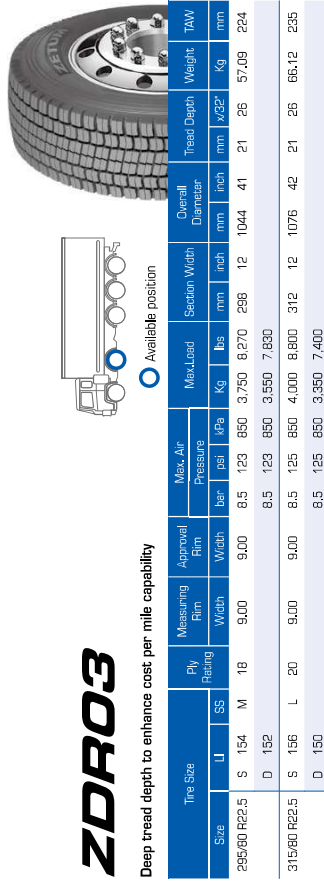



 Available position

Tire Size	Ply Rating	Measuring Rim Width	Approval Rim Width	Max. Air Pressure		Max. Load	Section Width	Overall Diameter	Tread Depth	Weight	TAW					
				bar	psi							mm	inch	mm	x/32"	Kg
295/60 R22.5	S 154 M 18	9.00	9.00	8.5	123	850	3,750	8,270	298	12	1044	41	21	26	57.09	224
D 152				8.5	123	850	3,550	7,600								
315/60 R22.5	S 156 L 20	9.00	9.00	8.5	125	850	4,000	8,800	312	12	1076	42	21	26	66.12	235
D 150				8.5	125	850	3,950	7,400								

## ZDR04

Deep tread depth to ensure long tread life

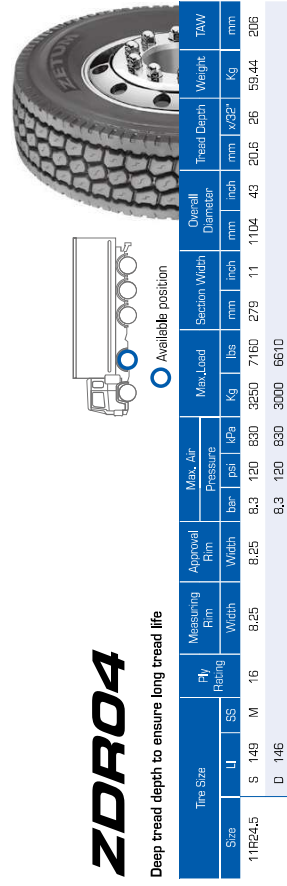

 Available position

Tire Size	Ply Rating	Measuring Rim Width	Approval Rim Width	Max. Air Pressure		Max. Load	Section Width	Overall Diameter	Tread Depth	Weight	TAW					
				bar	psi							mm	inch	mm	x/32"	Kg
11R24.5	S 149 M 16	8.25	8.25	8.3	120	830	3250	7160	279	11	1104	43	20.6	26	59.44	206
D 146				8.3	120	830	3000	6610								

